


PLASMA CUTTING

Hand Torches for Heavy-Duty application

NEW



Quality - Technology - Innovation

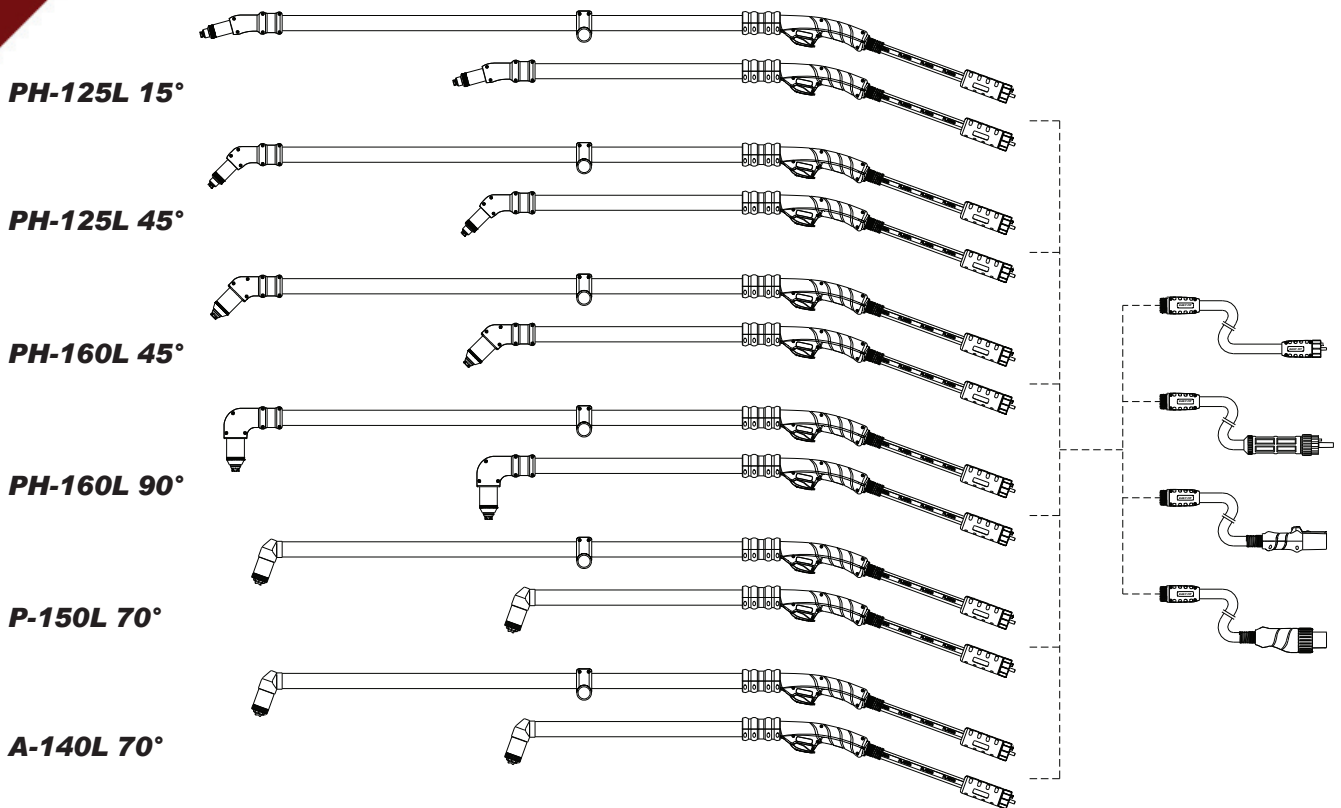

PH-125L

No high frequency start 125A

05431LA	Hand torch Heavy-Duty PH-125L 15°	130cm (52"), EASYFIT connection
05431LB	Hand torch Heavy-Duty PH-125L 15°	80cm (31"), EASYFIT connection
05431LE	Hand torch Heavy-Duty PH-125L 45°	130cm (52"), EASYFIT connection
05431LF	Hand torch Heavy-Duty PH-125L 45°	80cm (31"), EASYFIT connection

PH-160L

No high frequency start 160A

05531LC	Hand torch Heavy-Duty PH-160L 45°	130cm (52"), EASYFIT connection
05531LD	Hand torch Heavy-Duty PH-160L 45°	80cm (31"), EASYFIT connection
05531LA	Hand torch Heavy-Duty PH-160L 90°	130cm (52"), EASYFIT connection
05531LB	Hand torch Heavy-Duty PH-160L 90°	80cm (31"), EASYFIT connection

P-150L

High frequency start 150A

04031LA	Hand torch Heavy-Duty P-150L 70°	130cm (52"), EASYFIT connection
04031LB	Hand torch Heavy-Duty P-150L 70°	80cm (31"), EASYFIT connection

A-140L

High frequency start 150A

06231LA	Hand torch Heavy-Duty A-140L 70°	130cm (52"), EASYFIT connection
06231LB	Hand torch Heavy-Duty A-140L 70°	80cm (31"), EASYFIT connection

Extensions and Leads.

05286FX-L	Extension 7.5m, Female EASYFIT 6pins - Male EASYFIT 6pins	
05288FX-L	Extension 15m, Female EASYFIT 6pins - Male EASYFIT 6pins	
09782FX-L **	Lead assembly 7.5m, Female EASYFIT 6pins - Male EURO CONNECTOR 6pins	
09787FX-L **	Lead assembly 15m, Female EASYFIT 6pins - Male EURO CONNECTOR 6pins	
05286FX-HY1	Lead assembly 7.5m, Female EASYFIT 6pins - Male HY H-105 connection	
05288FX-HY1	Lead assembly 15m, Female EASYFIT 6pins - Male HY H-105 connection	
05286FX-HY2	Lead assembly 7.5m, Female EASYFIT 6pins - Male HY H-125 connection	
05288FX-HY2	Lead assembly 15m, Female EASYFIT 6pins - Male HY H-125 connection	
05286FX-TD	Lead assembly 7.5m, Female EASYFIT 6pins - Male TD connection	
05288FX-TD	Lead assembly 15m, Female EASYFIT 6pins - Male TD connection	

** Connection to the system to be confirmed on the purchase order